

2021 HOLOSUN

ELITE



HOLOSUN

ELITE SERIES

As the Holosun brand has grown, we also offer a product line for professionals who demand the best. Elite products build on all of the great Holosun features you have come to love, but enhance the design with innovations such as Gold or Green L.E.D. technology, or an extremely rugged titanium housing.

TECHNOLOGY INNOVATIONS

Here are some of the innovations that make an Elite product... ELITE.

GREEN L.E.D.

Cones in the Human eye are more sensitive to green frequencies than any other color. Additionally Holosun's Green LED is far more efficient than our Red diode at the highest brightness settings. This reticle also provides an option for those who have difficulty seeing in the red color spectrum and for those who also run a red laser on their platform.

GOLD L.E.D.

Yellow is the brightest color in the visual spectrum and it has the added benefit of being color blind neutral. Whether you are running visible lasers and you want to differentiate your reticle from the beam, or you are looking for a high contrast color to your specific environment, The Holosun Gold reticle gives you the flexibility you need.

TITANIUM HOUSING

Expanding on the use of aluminum, several models are now offered in Grade 5 Titanium offering up to 3x more structural strength.

*Not all features are available on all models.



HE508T X2 HE509T X2

FEATURES & TECH

- Red or Green reticle color
- Multiple Reticle System™ (MRS): 2MOA Dot only, 32MOA Circle only, 2MOA dot with 32MOA Circle
- Solar FailSafe™
- Shake Awake Technology™
- Up to a 50,000 Battery Life
- Side Mounted 1632 Battery

SPECS

- IP67 Certified Waterproof
- Travel Range \pm 50 MOA
- Reticle Brightness: 10 Daylight & 2 Night Vision Compatible Settings
- 1 MOA Windage & Elevation Adjustment Per Click
- Window Size: 0.63 x 0.91 inches
- Grade 5 Titanium Housing

HE509T-RD X2
HE509T-GR X2



HE508T-RD X2
HE508T-GR X2

HE508T-RD X2/HE509T-RD X2



HE508T-GR X2/ HE509T-GR X2



HE512C-GD/T


FEATURES & TECH

- Up to a 50,000 Hour Battery life
- Red & Green (HE512T Only) or Gold (HE512C-GD Only) reticle color
- Multiple Reticle System™ (MRS): 65 MOA Circle & 2 MOA Dot; 2 MOA Dot; 65 MOA Circle
- Solar FailSafe™
- Shake Awake Technology™
- Parallax Free & Unlimited Eye Relief

SPECS

- IPX8 (HE512T) or IP67 (HE512C-GD) Certified Waterproof
- Travel Range ± 50 MOA
- Reticle Brightness: 10 Daylight & 2 Night Vision Compatible Settings
- ½ MOA Windage & Elevation Adjustment Per Click
- Window Size: 0.91 x 1.2 inches
- Titanium Body (HE512T Only)
- Durable Aluminum Body (HE512C-GD Only)

HE512T-RD | HE512T-GR



HE512C-GD



HE512T-RD
HE512T-GR



HE512C-GD





HE407K X2 HE507K X2

FEATURES & TECH

- Up to a 50,000 Hour battery life
- Miniaturized to fit most optics ready subcompact and pocket carry pistols
- 6 MOA Dot Reticle (HS407K-GR X2)
- Multi-Reticle System (MRS) 32 MOA Circle & 2 MOA Dot; 2 MOA Dot; 32 MOA Circle (HS507K-GR X2)
- Shake Awake Technology™

SPECS

- CNC Milled 7075 Aluminum Housing
- Travel Range \pm 50 MOA
- Reticle Brightness: 10 Daylight & 2 Night Vision Compatible Settings
- $\frac{1}{2}$ MOA Windage & Elevation Adjustment Per Click
- Window size: 0.58 x 0.77 inches
- IP67 Certified Waterproof

HE407K-GR X2



HE507K-GR X2



HE407K-GR X2



HE507K-GR X2

HE510C-GR



HE407C-GR X2



HE507C -GR X2



HE510_C HE407_C X2 HE507_C X2

FEATURES & TECH

- Up to a 50,000 Hour Battery life
- Green LED Emitter
- Multiple Reticle System™ (MRS) (HE507C-GR X2 and HE510C-GR Only)
- Solar FailSafe™
- Shake Awake Technology™
- Parallax Free & Unlimited Eye Relief

SPECS

- IP67 Certified Waterproof
- Travel Range ± 50 MOA
- Reticle Brightness: 10 Daylight & 2 Night Vision Compatible Settings
- ½ MOA (HE510C) or 1 MOA (HE507C-GR X2 & HE407C-GR X2) Windage & Elevation Adjustment Per Click
- CNC Milled 7075 Aluminum Housing (HE407C-GR X2 and HE507C-GR X2 Only)
- Aluminum Housing w/ Titanium Hood (HE510C-GR Only)

HE510C-GR/HE507C-GR X2



HE407C-GR X2





HE403^{B/C/R}

FEATURES & TECH

- Up to a 100,000 Hour Battery life (HE403R-GD only)
- Up to a 50,000 Hour Battery life (HE403B-GR & HE403C-GR)
- Green (HE403B-GR & HE403C-GR) or Gold (HE403R only) LED Emitter
- 2 MOA Dot Reticle
- Solar FailSafe™ (HE403C-GR Only)
- Shake Awake Technology™ (HE403B-GR Only)
- Parallax Free & Unlimited Eye Relief

SPECS

- IP67 Certified Waterproof
- Travel Range \pm 50 MOA
- Reticle Brightness: 10 Daylight & 2 Night Vision Compatible Settings
- $\frac{1}{2}$ MOA Windage & Elevation Adjustment Per Click
- Window Size: 22mm Diameter
- CNC Milled 6061 Aluminum Housing (HE403B/C-GR Only)
- Durable Aluminum Housing (HE403R-GD Only)

HE403B/C-GR



HE403R-GD



HE403B-GR



HE403C-GR



HE403R-GD



HE503_{R/CU}



HE503R-GD



HE503CU-GR

FEATURES & TECH

- Up to a 100,000 Hour Battery life (HE503R-GD only)
- Up to a 50,000 Hour Battery life (HE503CU-GR only)
- Green (HE503CU-GR) or Gold (HE503R-GD) LED Emitter
- Multiple Reticle System™ (MRS): 65 MOA Circle & 2 MOA Dot; 2 MOA Dot
- Solar FailSafe™ (HE503CU-GR Only)
- Shake Awake Technology™ (HE503CU-GR Only)
- Parallax Free & Unlimited Eye Relief

SPECS

- IP67 Certified Waterproof
- Travel Range ± 50 MOA
- Reticle Brightness: 10 Daylight & 2 Night Vision Compatible Settings
- ½ MOA Windage & Elevation Adjustment Per Click
- Window Size: 22mm Diameter
- CNC Milled 6061 Aluminum Housing

HE503CU-GR



HE503R-GD





HE515GM/CM

FEATURES & TECH

- Up to a 50,000 Hour Battery life
- Green LED Emitter
- Multiple Reticle System™ (MRS): 65 MOA Circle & 2 MOA Dot; 2 MOA Dot
- Solar FailSafe™ (HE515CM-GR Only)
- Shake Awake Technology™
- Parallax Free & Unlimited Eye Relief

SPECS

- IPx8 Certified Waterproof
- Travel Range \pm 50 MOA
- Reticle Brightness: 10 Daylight & 2 Night Vision Compatible Settings
- ½ MOA Windage & Elevation Adjustment Per Click
- Window Size: 22mm Diameter
- CNC Milled 7075 Aluminum Housing

HE515GM/CM-GR



HE515CM-GR



HE515GM-GR





HE515GT-RD
HE515GT-GR



HE515CT-RD
HE515CT-GR

HE515^{GT/CT}

FEATURES & TECH

- Up to a 50,000 Hour Battery life
- Red or Green reticle color
- Multiple Reticle System™ (MRS): 65 MOA Circle & 2 MOA Dot
- Solar FailSafe™ (HE515CT)
- Shake Awake Technology™
- Parallax Free & Unlimited Eye Relief
- Grade 5 Titanium Housing

SPECS

- IPx8 Certified Waterproof
- Travel Range ± 50 MOA
- Reticle Brightness: 10 Daylight & 2 Night Vision Compatible Settings
- ½ MOA Windage & Elevation Adjustment Per Click
- Window Size: 22mm Diameter

HE515 GT/CT-RD



HE515 GT/CT-GR





HE530_{G/C/GC}

FEATURES & TECH

- Up to a 50,000 Hour Battery life
- Red or Green reticle color
- Multiple Reticle System™ (MRS): 65 MOA Circle & 2 MOA Dot; 2 MOA Dot
- Solar FailSafe™ (HE530C/GC Only)
- Shake Awake Technology™
- Parallax Free & Unlimited Eye Relief

SPECS

- IPx8 Certified Waterproof
- Travel Range ± 50 MOA
- Reticle Brightness: 10 Daylight & 2 Night Vision Compatible Settings
- ½ MOA Windage & Elevation Adjustment Per Click
- Window Size: 30mm Diameter
- Grade 5 Titanium Housing

HE530G/C/GC-RD



HE530G/C/GC-GR



HE530G-GR
HE530G-RD



HE530C-GR
HE530C-RD

HE530GC-GR
HE530GC-RD



LE117^{R/G/IR} LE221

FEATURES & TECH (LE117)

- Visible or IR Laser Pointer
- HI/LOW Mode Selector

FEATURES & TECH (LE221)

- Coaxial Laser Mechanism
- Visible and IR Laser Pointer
- Multifunctional Mode Selector

SPECS

- IPx8 Certified Waterproof
- Travel Range \pm 60 MOA
- $\frac{1}{2}$ MOA Windage & Elevation Adjustment Per Click
- Grade 5 Titanium Housing (LE117 & LE221)

LE117



LE221



LE117



LE221





LE321

LE321KIT

FEATURES & TECH

- Coaxial Laser Mechanism
- Visible and IR Laser Pointer
- Adjustable Focus IR Illuminator
- Multifunctional Mode Selector
- Grade 5 Titanium Housing
- Integrated Reflex Optic (LE321 Kit Only)

SPECS

- IPx8 Certified Waterproof
- Travel Range \pm 60 MOA
- $\frac{1}{2}$ MOA Windage & Elevation Adjustment Per Click
- One CR123A


LE321




LE321 KIT



LE321

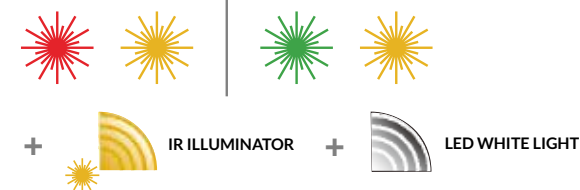

LE321 KIT

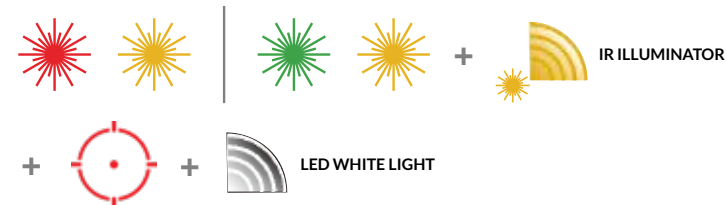

LE420

FEATURES & TECH

- Coaxial Laser Mechanism
- Visible and IR Laser Pointer
- IR Laser & White LED Illuminator
- Adjustable Focusing Knob
- Multifunctional Mode Selector
- Ability to integrate red dot with included bracket
- Two CR123A / One 18650 battery

SPECS

- IPx8 Certified Waterproof
- Travel Range \pm 60 MOA
- $\frac{1}{2}$ MOA Windage & Elevation Adjustment Per Click
- Grade 5 Titanium Housing

LE420





HM3XT

FEATURES & TECH

- Ultra Compact Design
- Flip-to-the-side Design
- Compatible with Absolute and Lower 1/3 Height Optics
- QD Mount & Spacer Included

SPECS

- Just 3.2 Inches long and 11.6 Oz
- IP67 Certified Waterproof
- Grade 5 Titanium Housing
- 7 degrees FOV (approx. 37ft/100yds)
- Eye Relief = 70mm/2.75in
- Exit pupil = 7.6mm/0.29in
- Magnification = 3X



MICRO REFLEX SIGHTS

PRODUCT SPECIFICATIONS

	HE407C-GR X2	HE407K-GR X2	HE507C-GR X2	HE507K-GR X2	HE508T-GR/RD X2
FUNCTIONS					
Selectable Reticle	□	□	■	■	■
Solar Power	■	□	■	□	■
Shake Awake Technology	■	■	■	■	■
Memory	■	■	■	■	■
OPTICAL DATA					
Light Source	LED	LED	LED	LED	LED
Wavelength	540nm	540nm	540nm	540nm	540nm & 650nm
Reticle	2 MOA Dot	6 MOA Dot	2 MOA Dot & 32MOA Circle	2 MOA Dot & 32MOA Circle	2 MOA Dot & 32MOA Circle
No Parallax	■	■	■	■	■
Unlimited Eye Relief	■	■	■	■	■
Magnification	1x	1x	1x	1x	1x
Multi-Coatings	■	■	■	■	■
Laser	□	□	□	□	□
ELECTRONIC DATA					
Battery	CR1632	CR1632	CR1632	CR1632	CR1632
Battery Life (Setting 6)	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
Brightness Setting	10 DLt & 2NV Compatible	10 DLt & 2NV Compatible	10 DLt & 2NV Compatible	10 DLt & 2NV Compatible	10 DLt & 2NV Compatible
MECHANICAL DATA					
Housing Material	7075 T6 Aluminium	7075 T6 Aluminium	7075 T6 Aluminium	7075 T6 Aluminium	Titanium
Surface Finish	Anodized	Anodized	Anodized	Anodized	Titanium Finish
Housing Color	Black	Black	Black	Black	Black
Adjustment per Click	1 MOA	1 MOA	1 MOA	1 MOA	1 MOA
W&E Travel Range	±50 MOA	±30 MOA	±50 MOA	±30 MOA	±50 MOA
Storage Temperature	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F
Working Temperature	-30°F~-140°F	-22°F~-140°F	-30°F~-140°F	-22°F~-140°F	-30°F~-140°F
Submersion	IP67	IP67	IP67	IP67	IP67
Vibration	5000G	5000G	5000G	5000G	5000G
PHYSICAL DATA					
Window Size(in)	0.63×0.91	0.58×0.77	0.63×0.91	0.58×0.77	0.63×0.91
Dimension(in)	1.78×1.15×1.15	1.6×0.98×0.95	1.78×1.15×1.15	1.6×0.98×0.95	1.78×1.15×1.15
Weight(oz)	1.5	1	1.5	1	2

■ INCLUDED □ NOT INCLUDED

	HE509T-RD X2	HE509T-GR X2	HE510C-GR	HE512T-GR/RD	HE512C-GD
FUNCTIONS					
Selectable Reticle	■	■	■	■	■
Solar Power	■	■	■	■	■
Shake Awake Technology	■	■	■	■	■
Memory	■	■	■	■	■
OPTICAL DATA					
Light Source	LED	LED	LED	LED	LED
Wavelength	650nm	540nm	540 nm	540nm & 650nm	590nm
Reticle	2 MOA Dot & 32MOA Circle	2 MOA Dot & 32MOA Circle	2 MOA Dot & 65MOA Circle	2 MOA Dot & 65MOA Circle	2 MOA Dot & 65MOA Circle
No Parallax	■	■	■	■	■
Unlimited Eye Relief	■	■	■	■	■
Magnification	1x	1x	1x	1x	1x
Multi-Coatings	■	■	■	■	■
Laser	□	□	□	□	□
ELECTRONIC DATA					
Battery	CR1632	CR1632	CR2032	CR2032	CR2032
Battery Life (Setting 6)	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
Brightness Setting	10 DLt & 2NV Compatible	10 DLt & 2NV Compatible	10 DLt & 2NV Compatible	10 DLt & 2NV Compatible	10 DLt & 2NV Compatible
MECHANICAL DATA					
Housing Material	Titanium	Titanium	Aluminium & Titanium Hood	Titanium	Aluminium
Surface Finish	Titanium Finish	Titanium Finish	MAO	Titanium Finish	MAO
Housing Color	Black	Black	Black	Black	Black
Adjustment per Click	1 MOA	1 MOA	0.5 MOA	0.5 MOA	0.5 MOA
W&E Travel Range	±50 MOA	±50 MOA	±50 MOA	±50 MOA	±50 MOA
Storage Temperature	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F
Working Temperature	-30°F~-140°F	-30°F~-140°F	-40°F~-140°F	-40°F~-140°F	-30°F~-140°F
Submersion	IP67	IP67	IP67	IPX8	IP67
Vibration	5000G	5000G	1000G	1000G	1000G
PHYSICAL DATA					
Window Size(in)	0.66×0.9	0.66×0.9	0.91×1.26	0.91×1.26	0.91×1.26
Dimension(in)	1.6×1.16×1.13	1.6×1.16×1.13	3.3×1.68×1.78	3.35×1.63×1.7	3.35×1.63×1.7
Weight(oz)	1.72	1.72	8.3	9.17	6.7

■ INCLUDED □ NOT INCLUDED

TUBE & OPEN REFLEX SIGHTS

PRODUCT SPECIFICATIONS

	HE403B/C-GR	HE403/503R-GD	HE503CU-GR	HE515CM-GR	HE515GM-GR	HE515CT-GR/RD	HE515G-GR/RD	HE530C-GR/RD	HE530G-GR/RD
FUNCTIONS									
Selectable Reticle	■	HE503R-GD	■	■	■	■	■	■	■
Solar Power	HE403C-GR	■	■	■	■	■	■	■	■
Shake Awake Technology	HE403B-GR	■	■	■	■	■	■	■	■
Memory	■	■	■	■	■	■	■	■	■
OPTICAL DATA									
Light Source	LED	LED	LED	LED	LED	LED	LED	LED	LED
Wavelength	540nm	540nm	540nm	540nm	540nm	540nm/650nm	540nm/650nm	540nm/650nm	540nm/650nm
Reticle	2 MOA Dot	2 MOA Dot/Circle Dot	2 MOA Dot & 65MOA Circle	2 MOA Dot & 65MOA Circle	2 MOA Dot & 65MOA Circle	2 MOA Dot & 65MOA Circle	2 MOA Dot & 65MOA Circle	2 MOA Dot & 65MOA Circle	2 MOA Dot & 65MOA Circle
No Parallax	■	■	■	■	■	■	■	■	■
Unlimited Eye Relief	■	■	■	■	■	■	■	■	■
Magnification	1x	1x	1x	1x	1x	1x	1x	1x	1x
Multi-Coatings	■	■	■	■	■	■	■	■	■
ELECTRONIC DATA									
Battery	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032
Battery Life (Setting 6, Dot Only)	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
Brightness Setting	10 DL & 2NV Compatible	10 DL & 2NV Compatible	10 DL & 2NV Compatible	10 DL & 2NV Compatible	10 DL & 2NV Compatible	10 DL & 2NV Compatible	10 DL & 2NV Compatible	10 DL & 2NV Compatible	10 DL & 2NV Compatible
MECHANICAL DATA									
Housing Material	6061 T6 Aluminium	Aluminium	6061 T6 Aluminium	7075 T6 Aluminium	7075 T6 Aluminium	Titanium	Titanium	Titanium	Titanium
Surface Finish	MAO	MAO	MAO	Anodize	Anodize	Titanium Finish	Titanium Finish	Titanium Finish	Titanium Finish
Housing Color	Black	Black	Black	Black	Black	Black	Black	Black	Black
Adjustment per Click	0.5 MOA	0.5 MOA	0.5 MOA	0.5 MOA	0.5 MOA	0.5 MOA	0.5 MOA	0.5 MOA	0.5 MOA
W&E Travel Range	±50 MOA	±50 MOA	±50 MOA	±50 MOA	±50 MOA	±50 MOA	±50 MOA	±50 MOA	±50 MOA
Storage Temperature	-40°C~-70°C	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F	-40°F~-158°F
Working Temperature	-30°F~-140°F	-30°F~-140°F	-30°F~-140°F	-40°F~-140°F	-40°F~-140°F	-40°F~-140°F	-40°F~-140°F	-40°F~-140°F	-40°F~-140°F
Submersion	IP67	IP67	IP67	IPX8	IPX8	IPX8	IPX8	IPX8	IPX8
Vibration	1000G	1000G	1000G	1000G	1000G	1000G	1000G	1000G	1000G
PHYSICAL DATA									
Window Size(in)	20mm Diameter	20mm Diameter	20mm Diameter	20mm Diameter	20mm Diameter	20mm Diameter	20mm Diameter	30mm Diameter	30mm Diameter
Dimension(in)	2.45×1.43×1.6	2.75×1.43×1.62	2.6×1.43×1.6	2.75×1.43×1.62	2.73×1.53×1.61	2.67×1.45×1.6	2.67×1.51×1.6	3.22×1.65×1.87	3.22×1.9×1.77
Weight(oz)	2.82	3.53	3	3.53	3.74	4.06	4.33	6.77	6.56

■ INCLUDED □ NOT INCLUDED

LASER & MAGNIFIER

PRODUCT SPECIFICATIONS

	LE420	LE321-GR/RD	LE221	LE117
FUNCTIONS				
Green Laser Pointer	▲	▲	▲	▲
Red Laser Pointer	■	■	■	■
IR Laser Pointer	■	■	■	■
IR Laser Illuminator	■	■	□	□
Flashlight	■	■	□	□
IR LED Illuminator	□	□	□	□
OPTICAL DATA				
Green or Red Laser Output Power(mW)	5	5	5	5
Green or Red Laser Class	IIIa	IIIa	IIIa	IIIa
IR Pointer or Illuminator Output Power(mW)	0.7	0.7	0.7	0.7
IR Pointer or Illuminator Class	2M	2M	2M	2M
Green Laser Wavelength(nm)	520	520	520	520
Red Laser Wavelength(nm)	635	635	635	635
IR Laser Wavelength(nm)	830	830	830	830
Flashlight Output Power(lum)	600			
IR LED Illuminator Power (lum)				
ELECTRONIC DATA				
Battery	2XCR123A/18650	CR123A	CR123A	CR123A
MECHANICAL DATA				
Housing Material	Titanium	Titanium	Titanium	Titanium
Surface Finish	Titanium Finish	Titanium Finish	Titanium Finish	Titanium Finish
Housing Color	Black	Black	Black	Black
Laser Adjustment per Click	0.5 MOA	0.5 MOA	0.5 MOA	0.5 MOA
Laser W&E Travel Range	±60 MOA	±60 MOA	±60 MOA	±60 MOA
Storage Temperature	-40°F~-149°F	-40°F~-149°F	-40°F~-149°F	-40°F~-149°F
Working Temperature	-40°F~-124°F	-40°F~-124°F	-40°F~-124°F	-40°F~-124°F
Submersion	IPX8	IPX8	IPX8	IPX8
Vibration	1000G	1000G	1000G	1000G
PHYSICAL DATA				
Dimension(in)	3.66×3.07×1.46	3.7×2.24×1.46	3.43×1.77×1.34	3.43×1.77×1.34
Weight(oz)	10.94	9.52	6.88	6.7

■ INCLUDED □ NOT INCLUDED ▲ OPTION

	HM3X Titanium
OPTICAL DATA	
Magnification	3X
Exit Pupil	7.6mm
Eye Relief	70mm
Filed of View	7°
Diopter	±3D
Transmittance	0.75
Lens material	Glass
ENVIRONMENT DATA	
Storage temperature	-40°F~-158°C
Operating temperature	-22°F~-140°C
Humidity (%)	0.95
Waterproof	IP67
Nitrogen (concentration)	0.9999
Vibration Resistance (1000)	>2MOA
MECHANICAL DATA	
Housing material	Titanium
Housing Finish	Titanium/Black
Dimension (mm)	3.2 x 1.8 x 2.5
Weight (oz)	11.6

HOLOSUN

HOLOSUN.COM